

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

**This Page Blank (uspto)**




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>H04Q 7/36</b>		A2	(11) International Publication Number: <b>WO 00/54533</b>
			(43) International Publication Date: 14 September 2000 (14.09.00)
(21) International Application Number: PCT/SE00/00245 (22) International Filing Date: 8 February 2000 (08.02.00) (30) Priority Data: 09/263,950                      8 March 1999 (08.03.99)                      US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (PUBL) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: LINDHEIMER, Christofer; Köpenhamngatan 26, S-164 24 Kista (SE). MAZUR, Sara; Vikavägen 11, S-167 71 Bromma (SE). MOLNÖ, Johan; Kungsklippan 12, S-112 25 Stockholm (SE). (74) Agent: NORIN, Klas; Ericsson Radio Systems AB, Common Patent Department, S-164 80 Stockholm (SE).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published Without international search report and to be republished upon receipt of that report.	

(54) Title: HIGH SPEED DATA COMMUNICATION SYSTEM AND METHOD

## (57) Abstract

A system and method for a synchronized packet data communication system is described. Briefly control channels are transmitted in a reuse pattern defined by both frequency and timeslot division. Each timeslot division is such that different timeslot groups included in the repetition pattern are separated by at least one timeslot. No traffic data transmissions occur simultaneous to the control channel transmissions. Furthermore, a synchronization channel is introduced to be transmitted on the same physical channel as other packet common control channels.

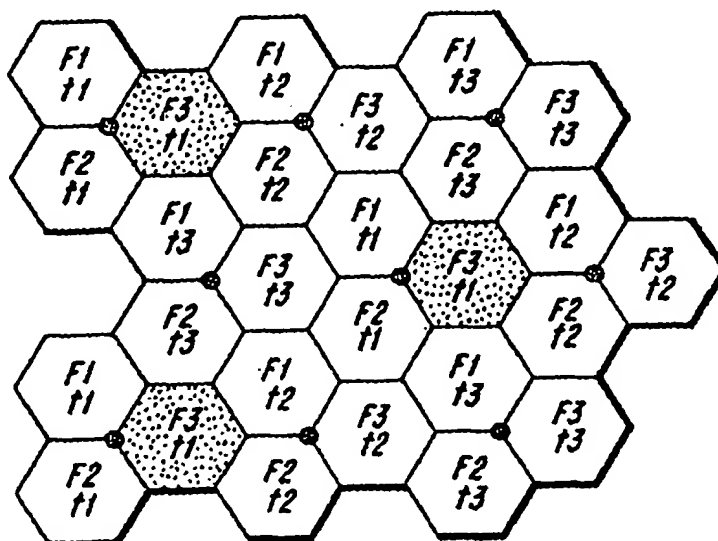

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

High speed data communication system and method

## BACKGROUND OF THE INVENTION

The present invention relates generally to cellular and wireless communication and more particularly to a system and method for communicating control and user  
5 information in a cellular packet data communication system.

Recently, there has been a trend in the telecommunication community to focus more and more on wireless packet data communication rather than circuit switched voice communication. With the tremendous increase of Internet users, it is believed that  
10 the packet switched communication will soon increase more and become larger than the circuit switched voice communication that today dominates the e.g., the cellular communication. Cellular communication system manufacturers and operators are therefore looking for solutions to integrate their circuit switched services with wireless packet switched services that can provide reliable and more spectrum efficient  
15 connections for packet switched users, e.g., Internet users. This trend has made different types of packet switched communication system evolutions flourish. One of the more well known packet switched cellular systems in the telecommunications community, even though it is not yet launched, is the extension of the present GSM cellular communication system, called GPRS (General Packet Radio Services).

20

GPRS is a packet switched system that uses the same physical carrier as the present GSM cellular communication system and is designed to coexist and provide the same coverage as GSM. GPRS radio interface is thus based on a TDMA structured system with 200 kHz carriers divided into eight timeslots with GMSK  
25 (Gaussian Minimum Shift Keying) modulation. The multiplexing is such that each timeslot can typically serve a number of users and one user can also be allocated more than one timeslot to increase its user throughput of data over the air. The

GPRS specification includes a number of different coding schemes to be used dependent on the quality of the radio carrier. With GPRS, data rates well over 100 kbps will be possible.

Recently there has also been a development and standardization effort to further  
5 increase the data throughput to GPRS, by introducing a higher level modulation than what is used for GSM and GPRS, i.e., GMSK. The enhancement of GPRS is called EGPRS (Enhanced GPRS) and employs an 8PSK (8 Phase Shift Keying) modulation format which will increase the data rates to over 384 kbps. Additional coding schemes are developed for this 8PSK that will make an efficient link adaptation  
10 possible. Link adaptation is a functionality that allows adaptation in terms of coding and modulation with respect to present signal quality. In poor radio conditions, a robust coding and GMSK modulation is selected whereas in good radio conditions, a less robust coding and 8PSK modulation is used. GPRS (and the extensions thereof) also has a backward error correction functionality in that it can request  
15 retransmissions of erroneously received blocks. This mechanism is called ARQ (Automatic Repeat reQuest) and is a well known mechanism in the art.

The GPRS is thus developed with the aim to introduce packet switched access in GSM system environments. Even though some features are duplicated for GPRS,  
20 e.g., specific packet control channels are defined, it is still dependent upon the existence of GSM circuit switched control channels.

For example GPRS may have its own Packet Broadcast Channels (PBCCH) and Packet Paging Channels (PPCH) but for cell reselection purposes, it is still dependent on listening to a GSM broadcast carrier. The reason for this is that a  
25 GPRS system does not provide any synchronization burst or frequency correction burst on the physical channels that carry the packet control channels, as presently standardized. This means that a GPRS system cannot exist by itself, it is dependent upon a GSM circuit switched control channel.

There is thus a problem today, to be able to run a stand-alone GPRS system without having to also implement a circuit switched mode.

Recent development for another TDMA based cellular system, the cellular communication system compliant to the IS-136 standard, below referred to as TDMA/136 has indicated a need for a high throughput packet data system to be integrated with the TDMA/136 circuit switched mode. Several companies in the telecommunication industry have come to an agreement that a high-speed packet switched mode in a TDMA/136 system could be based on GPRS and the extensions thereof. This will allow for possibilities of providing bit rates up to 384 kbps on 200 kHz carriers with GMSK and 8PSK modulation, like that of GSM/GPRS.

This integration does not, however, come without a cost. First and foremost, the TDMA/136 carriers have a bandwidth of only 30 kHz, to be compared with GSM/GPRS carriers of 200 kHz. This means that operators that want to introduce GPRS have to allocate 200 kHz for each GPRS carrier. Adding that some frequency reuse is needed for providing coverage and for limiting co-channel interference, this means that a TDMA/136 operator have to allocate a substantial amount of spectrum and thereby allocate bandwidth to GPRS that could otherwise be used for 30 kHz circuit switched channels. This has put requirements on the implementation of GPRS on 200 kHz carriers in TDMA/136 system. It should be possible to introduce GPRS within a bandwidth requirement below 1 MHz. Taking possible frequency reuse patterns and guard bands between 30 kHz carriers and 200 kHz carriers into consideration, this means that a 1/3 frequency reuse pattern must be deployed. A 1/3 frequency reuse pattern means, e.g., that all base station sites transmit in three sectors and with a different set of physical channels in each sector.

A physical channel can be a frequency or a timeslot or a combination thereof. Of course, if other systems than TDMA systems are considered, e.g., CDMA systems, a physical channel can also include combinations of a certain code pattern. Logical



channels can be transmitted on one or more physical channels. A logical channel is defined by its content, e.g., control channels, traffic channels, broadcast channels etc.

Reuse patterns are introduced in cellular systems such that one can reuse the same frequencies in different cells. This should typically be done in a way such that the co-channel interference caused by base stations transmitting on the same frequency in closely located cells is limited. The higher the reuse, the better the carrier to interference ratio for an exemplary condition. A 1/3 reuse is illustrated in figure 1.

GPRS channels typically have different levels of robustness depending on the type of logical channel being transmitted. In a packet data system, reliance on retransmission possibilities can allow a quite high error rate and at least for this reason, the reuse for user data traffic channels can be kept quite low. A data traffic channel can be deployed in a 1/3 reuse whereas packet common control channels are not robust enough to be allocated in a 1/3 reuse, since the same retransmission possibilities are not used for these channels. A 3/9 reuse is recommended for packet data control channels. A 3/9 reuse means that there are 9 different sets of physical channels divided over three base station sites, where each site transmit in three sectors.

Considering the spectrum requirement of 1 MHz and a possible reuse requirement of 3/9 for packet common control channels, it is not possible, by just dividing the physical channels into different frequencies, to achieve such a reuse pattern. Only three-four 200 kHz frequencies can be allocated on 1 MHz, since some 2x100 kHz are needed as guard band between different types of carriers, e.g., 30 and 200 kHz carriers. Therefore, some other strategy is needed.

In patent application document WO 97/12489 with Pacific Communication Sciences Inc. as assignee is described a time sharing method and apparatus for frequency reuse in cellular communication systems. Frequency reuse is enhanced by



synchronizing cell transmit/receive base stations in a cellular system to a common time base, and then sharing the available frequencies via allocated time slots.

In patent application document WO 98/31110 with Nokia Telecommunications as assignee, a method for improving system capacity is described. Nearby base stations  
5 using the same carrier do not send a broadcast time slot substantially simultaneously.

There are ways to increase a reuse pattern without having to allocate a higher frequency reuse. In a synchronized system, an overlaid timeslot reuse is also  
10 possible. The WO 98/31110 application is about broadcast messages in a circuit switched communication system.

It is found that the techniques described in these patent applications can be substantially improved to ensure control signalling message arrival in a receiving radio station and that additional actions can be taken in a synchronized system to  
15 ensure reliable reception of control signalling messages.

There are thus possibilities, in a further improved solution, to receive control signalling in a system that employs a lower frequency reuse than what is required by the control channels to be transmitted therein.

In another aspect it is to be noted that to be able to introduce 200 kHz GPRS carriers  
20 with 8PSK and GMSK modulation in a TDMA/136 system, the GPRS functionality that relies on a GSM control channel needs to be considered. It will not necessarily be the case that a GSM control channel is desired in a TDMA/136 system, since this system may not have a GSM circuit switched mode at all. As mentioned above, the channels that are necessary for a GPRS system, but transmitted in a GSM circuit  
25 switched mode, are the synchronization channel (SCH) and the Frequency Correction channel (FCCH) in GSM. GPRS systems rely on the capability of listening to this information. Therefore, it would be advantageous with a method for introducing synchronization and frequency correction possibilities in a GPRS system

without also having to implement GSM circuit switched mode and the control channels associated therewith.

## SUMMARY OF THE INVENTION

5 In one aspect of the present invention, a method and system is described, that can handle the above described deficiencies and provide a sufficient reuse pattern by introducing additional requirements on the control channel allocation. This method is based on a timeslot and frequency reuse in a base station synchronized system, such that a base station site is allocated certain timeslot or timeslots, herefrom called  
10 time group, on a frequency for control channel allocation. In another base station site, using the same frequency, a different time group is allocated, such that the control channels are not allocated at the same time in closely located base station sites. In addition, to be able to handle propagation delays, different time groups do not include timeslots adjacent to a different time group. There is thus a minimum of one timeslot  
15 between two time groups to be able to handle propagation delays and avoid overlap of control channel symbols from different time groups.

In another aspect of the present invention, a first base station site that is allocated a certain frequency and time group to transmit control channel messages on the timeslots included in the time group. A second base station site is allocated the same  
20 frequency and another time group and could in theory transmit non-control channel messages on the timeslots coinciding with the first base station site's control channel allocated time group. In this aspect of the present invention, no transmission occurs in the timeslots coinciding with the first base stations time group for control channels. This improvement will ensure a more reliable reception of control channel signalling  
25 in all base station sites.

In yet another aspect of the present invention, a synchronization channel is introduced in a set of packet common control channels, such that, in that respect, a

system compliant to the GPRS specification will not be dependent upon the implementation of a GSM circuit switched control channel. To be able to distinguish this new synchronization channel from the synchronization channel used in circuit switched GSM, a new coding is suggested. This new coding will allow a receiving unit to distinguish between different types of synchronization channels by reading a specific bit pattern value that are not present in the existing synchronization channel in circuit switched GSM.

### BRIEF DESCRIPTION OF THE DRAWINGS

- 10 The invention will now be more thoroughly described and references will be made to the accompanying figures, of which:
- FIGURE 1 illustrates a cellular pattern of a 1/3 frequency reuse,
- FIGURE 2 illustrates a cellular pattern of a 1/3 frequency reuse with an overlaid 1/3 timeslot reuse, creating an effective 3/9 time-frequency reuse,
- 15 FIGURE 3 illustrates a packet control channel allocation pattern in a 52 multiframe structure according to one embodiment of the present invention,
- FIGURE 4 illustrates a packet control channel allocation pattern in a 52 multiframe, including Packet Synchronization Channel and Packet Frequency Synchronization Channel allocation structure according to one embodiment of the present invention,
- 20 FIGURE 5a illustrates coding of a Synchronization Channel,
- FIGURE 5b illustrates a new coding of a Packet Synchronization Channel according to one embodiment of the present invention,
- FIGURE 6 illustrates Synchronization Channel format for GSM circuit switched control channels,
- 25 FIGURE 7 illustrates Packet Synchronization Channel format according to one embodiment of the present invention,

FIGURE 8 illustrates a GPRS system integrated with a TDMA/136 system according to different embodiments of the present invention:

### DETAILED DESCRIPTION

- 5 The present invention will now be described in terms of specific embodiments for a TDMA packet switched communication system compliant to the GPRS standard specification.

In a typical packet data communication system employing Time Division Multiple Access (TDMA), the physical channels on which communication can occur are  
10 divided into timeslots on a physical carrier. In the GSM and GPRS cellular communication system, each carrier frequency is divided into eight timeslots, or eight physical channels. Eight consecutive physical channels are called a TDMA frame. There are typically different types of repetition cycles in the TDMA structure, such that e.g., certain control signalling and broadcast messages should take place a  
15 certain number of times within such repetition cycles. In the GPRS specification, one important repetition cycle is a 52 multiframe. This 52 multiframe form the basis of how many physical channels that should be allocated for different logical channels, e.g., Packet Data Traffic Channels (PDTCH), Packet Broadcast Channels (PBCCH), Packet Paging Channels (PPCH) and Packet Access Grant Channels (PAGCH). The  
20 52 multiframe structure is used as soon as there are possibilities to allocate PDTCHs on the same timeslot. GPRS further divide each timeslot in the 52 multiframe into 12 blocks with 4 TDMA frames in each, 2 idle TDMA frames and 2 frames used for Packet Timing Advance Control Channel Signalling (PTCCH), total  $4 \cdot 12 + 2 + 2 = 52$  TDMA frames. The GPRS frame structure and block allocation of  
25 logical channels is further described in ETSI TS 100 908 v.6.2.0 Digital Cellular Communication System (Phase 2+); "Multiplexing and multiple access on the radio path" (GSM 05.02 version 6.2.0 Release 1997), hereby incorporated by reference.

When GPRS is to be introduced in TDMA/136 systems, it would be advantageous to limit the amount of interworking functionality between the different system modes and the different physical carriers, for TDMA/136, 30 kHz (Differential Quaternary Phase Shift Keying) DQPSK modulated carriers and for GPRS, 200 kHz carriers. By

5 interworking functionality is meant that one of the system modes (system modes are TDMA/136 circuit switched mode and GPRS packet switched mode) have to handle functionality that relates more to the other system mode, e.g., circuit switched paging of mobiles in packet switched mode. Such interworking functionality can be that which GPRS relies on, supported today by GSM circuit switched control channels,

10 e.g., frame synchronization. The more limited the interworking is, the easier will the implementation of the GPRS mode in TDMA/136 be. Also, if the most important functionality can be handled in the GPRS mode itself, it will be possible to support users that do not have any TDMA/136 capability with packet switched communication also in the TDMA/136-GPRS system. Further possibilities to launch pure GPRS

15 systems can also be considered.

The requirement of TDMA/136-GPRS migration with 1 MHz of spectrum for the GPRS 200 kHz carriers however, put additional difficulties to the control channel introduction on 200 kHz. As discussed above, the packet common control channels must have a reuse that is higher than 1/3, which is the possible frequency reuse

20 satisfying the bandwidth requirement of 1 MHz. It would be advantageous to be able to have packet control channels on 200 kHz, since otherwise, the TDMA/136 mode has to be redefined to also support packet control on 30 kHz carriers.

One step towards a "self-sufficient" GPRS system that does not rely on the TDMA/136 mode for its functionality is to allow packet common control channels as

25 defined for GPRS and transmit packet common control information on 200 kHz carriers. This can be done in a system where 200 kHz carriers are time synchronized from different base stations. This time synchronization can be done in a number of different ways, e.g., by way of GPS (Global Positioning System) receivers in the base

station sites, such that a common time reference is achieved. The time synchronization means that a mobile station camping in one cell automatically knows the frame structure of neighboring cells. If different timeslots are used to allocate packet common control channels in different cells, then the actual reuse of for the  
5 packet common control signalling can be made higher than the actual frequency reuse. In figure 2 is illustrated an exemplary frequency and time reuse pattern according to one embodiment of the present invention. Therein frequencies are repeated in a 1/3 reuse, and an overlaying repetition of timeslots, also in a 1/3 reuse generate an effective 3/9 reuse for the timeslots that are used for the packet common  
10 control signalling.

In figure 3 is illustrated an exemplary 52 multiframe structure and a distribution of packet common control channels such that a 3/9 reuse according to figure 2 can be achieved. In figure 3, three different time groups are illustrated. Those are exemplary time groups that could be distributed in a manner similar to that illustrated in figure 2.  
15 Note that the time groups are only applicable to the TDMA frame blocks and timeslots that are allocated for packet control signalling, i.e., Packet Common Control Channels PCCCH (including PAGCH, PPCH in the downlink and PRACH in the uplink) and Packet Broadcast Channels PBCCH. In Time group 1, 52 TDMA frames 0..51, including eight timeslots each, are depicted. In the first block ,B0, consisting of  
20 TDMA frames 0..3 on the first timeslot, TS0, a packet broadcast channel (PBCCH) block is transmitted. In the following four blocks B1 to B4, consisting of TDMA frames 4..7 and 8..11, 13..16 and 17..20 respectively, no control channel signalling is transmitted. In the following block, B5, TDMA frames 21..24, a PCCCH block is allocated. TDMA frames 12 and 38 are used for PTCCH, Packet Timing Advance  
25 Control Channel, a channel used in GPRS to transfer signalling messages including timing advance information for mobiles sharing the PTCCH on the same physical channel. Following the same reasoning for time group 1, PCCCH blocks are further

allocated in block B8 and B11. It should be noted that the PCCCH blocks are shaded in grey and the PBCCH blocks are black in the figure.

In a similar manner, for Time group 2, the packet control channel blocks are distributed in the same block numbers but on different time slots. For example, in time group two, the same blocks are used but on timeslot 3 instead and in time group 3, timeslot 6 is used. Of course, other alternatives are possible. It should also be noted that although the number of control channel blocks in this description has been 1 PBCCH block and 3 PCCCH blocks, other combinations are of course possible. For example, 3 PBCCH blocks and 5 PCCCH blocks can be allocated, or actually any combination where the total number of blocks are below or equal to 12.

In one aspect of the present invention the selection of timeslots to be used for the different time groups, are such that there is at least one timeslot between two time groups. This timeslot can be used for traffic data communication rather than control channel communication. The reason for this is to introduce an additional guard period between the timeslots that are allocated for control channels. This guard period will decrease the risk of having control channel time groups disturbing each other, e.g., due to propagation delays. This allocation strategy will thus introduce less interference in control channel transmissions and a more reliable detection of the control channel information. In figure 4, it can be noted that TS 0, TS 3 and TS 6 are used for the different timegroups, leaving at least one timeslot between the different groups.

In another aspect of the present invention, allocation of control channel blocks is considered in another way. The previous strategy of allocating control channel blocks in time groups that are separated with at least one timeslot, as well as the strategy to be described below, aim at obtaining a more reliable detection of control channel messages.

In this aspect of the present invention, traffic channel blocks coinciding in time with control channel blocks in a cell using a different time group, should not be used for

traffic. This is illustrated in figure 3, by way of checkered timeslots. These are blocks that are not used for control signalling in respective time groups, but rather coincide with blocks that are used for control signalling in other time groups. Restricting usage of these timeslots will minimize interference during the times when the control signalling is transmitted, and the control channels can be managed in a reuse situation that would otherwise not be possible. Thus, it will be possible to reliably introduce packet common control and broadcasting channels with the strategy described in the above aspects of the present invention. More importantly, it will be possible to reliably detect the packet control channels even in a tighter frequency reuse pattern, e.g., a 3/9 frequency reuse pattern.

The discussion so far has been with respect to control channels transmitted in the downlink, from the base station to the mobile station. For example, broadcast messages, paging messages and similar. It should also be noted that the same strategies may also be applied for uplink transmissions, from the mobile station to the base station. In an alternate embodiment of the present invention, the packet random access channel, (PRACH) is allocated on timeslots and blocks in the same way as has been described for the packet control channels in the downlink. This will result in less interference being introduced by the PRACH and also from other traffic. Furthermore, the likelihood that PRACH in different time groups will coincide is decreased with the time slot separation discussed above.

It has been previously discussed above that the packet common control channels in GPRS cannot alone support a GPRS system. The reason for this is that the packet common control channels, as defined today does not allow for any Synchronization Channel (SCH) or Frequency Correction Channel FCCH. The SCH is a logical channel transmitted in the GSM circuit switched control channel structure. It carries information for frame synchronization of the mobile station and identification of a base transceiver station, i.e., a base station. If a GPRS system is to be operated



without any circuit switched mode, it would today still require the GSM circuit switched control channels, at least for this reason. The FCCH on the other hand, carries information for frequency correction of the mobile station. This may also be necessary to have in a GPRS system.

- 5 If it is possible to overcome these deficiencies and move towards a GPRS system that can run without a GSM circuit switched mode, it will be possible to introduce the GPRS system in other circuit switched system environments. This will also mean that a migration with TDMA/136 as a circuit switched mode and GPRS as a packet switched mode will become more straightforward.
- 10 In another aspect of the present invention, a novel technique for introducing synchronization and possibly also frequency correction as packet common control channels is presented. A new synchronization channel called Packet Synchronization Channel (PSCH) is proposed. This channel, PSCH, is allocated on one timeslot in at least one TDMA frame in each 52 multiframe structure. This is illustrated in figure 4.
- 15 Comparing figure 4 with figure 3, it can be seen in figure 4 that in the first idle TDMA frame, TDMA frame 25, the control channel time groups include a new frequency correction channel, a Packet Frequency Correction Channel (PFCCH). This TDMA frame is indicated by vertical stripes. In the second Idle TDMA frame, TDMA frame 51, the Packet Synchronization Channel (PSCH) is introduced. This is indicated by
- 20 horizontal stripes in the figure. Other possibilities to distribute the PSCH and the PFCCH are of course possible, but will introduce larger steps away from the present definitions of the packet control channel structure in a GPRS 52 multiframe.
- One of the difficulties with the present change is that the coding of the frame numbers in the packet synchronization channel, PSCH, cannot be made in the same
- 25 way as the coding of the frame number in the circuit switched synchronization channel, SCH. In the circuit switched case, a SCH is repeated in a 51 multiframe cycle, whereas in the packet switched case, the PSCH must be repeated in a 52 multiframe cycle.

In figure 5a and figure 6, is illustrated the 51 and 52 multiframe structures as defined in the present ETSI GSM specifications. The longest TDMA frame cycle consists of 2 715 648 TDMA frames divided in superframes consisting of twenty-six 51 TDMA frames, or fifty-one 26 TDMA frames. The frame number coding in the present SCH is such that 11 bits are used to indicate the superframe number, 0..2047, 5 bits are used to indicate the twenty-six 51 TDMA frames and further 3 bits are used to indicate the synchronization burst position. In a 51 multiframe there are 5 synchronization bursts, located in TDMA frame number 1, 11, 21,31 and 41. This coding is illustrated in figure 6. A base station identity code, BSIC, is included in each SCH transmission. Further 2+8+1 bits are included for coding the superframe phase, T1, 5 bits to code the 51 multiframe number, T2, and 3 bits to code the position of the SCH burst in a 51 multiframe, T3, i.e., TDMA frame number 1, 11,21,31 or 41.

In one embodiment of the present invention a 52 multiframe will only include one position for PSCH. The novel suggested coding of this is illustrated in figure 5 b and figure 7.

The same base station identity code, BSIC will be used as before. In the PSCH, 10 bits will be used to code a superframe phase including fifty-one 52 multiframes, R1. 6 bits will be used to indicate the 52 multiframe number in a superframe, R2. Following 3 bits, R3 will be coded such that it differs from the coding of the T3 bits in the present SCH. This is done to indicate that coding of the frame number follows a 52 multiframe structure and not a 51 multiframe structure, i.e., to indicate that the message actually is a PSCH and not an SCH. This is possible to do since the three T3 bits only has five values in the SCH, but could in theory represent eight different values, i.e.,  $2^3$ . If the last three bits are coded as one of the three values not used in T3 bits in the SCH, then a mobile station decoding such a message will immediately know that it is listening to a 52 multiframe PSCH. In one embodiment, only one PSCH is transmitted and the position thereof is then inherently given. In alternate embodiments it is possible to introduce more than one PSCH in a 52 multiframe

structure, in which case it can be possible to use another of the three values, not used in T3 coding in SCH, to represent this constellation. Since there are three values that are not used for T3, then R3 can take three unique values that both indicate the position of the PSCH, possibly in a combination with PFCCH, shifted a number of TDMA frames from the position of PSCH. It may also indicate the number of times a PSCH is transmitted in a 52 multiframe.

For example, in a circuit switched GSM SCH, the T3 bits can only take the values 0...4. Coding the corresponding bits on the PSCH, R3, as the value 5 (101) may mean that it is a transmission of a PSCH rather than a SCH. The value 5 could further mean that there is one occurrence of PSCH on TDMA frame 51 and one occurrence of a PFCCH on TDMA frame 25. This case is illustrated in figure 7. This is of course exemplary, other possibilities can equally well be represented with the values not used, e.g., two packet synchronization occurrences.

The steps taken above in the different aspects of the present invention are all introduced to be able to run a GPRS system without also having to allocate channel resources for a circuit switched GSM control channel. This will increasingly ease the migration of GPRS packet data mode in other circuit switched environments than GSM, e.g., TDMA/136 circuit switched systems. It will further make it possible to run GPRS in a tight frequency reuse pattern, even without any circuit switched mode at all.

In figure 8 is illustrated a possible network overview for the migration of GPRS and TDMA/136. It should be noted that the illustration is of a logical nature rather than a physical, and that several of the functional nodes in the TDMA/136 mode or system part may well be co-located or integrated with the functional nodes in the GPRS mode or system part. Specifically in figure 8, is illustrated a packet control unit (PCU), that handles the allocation of certain channels to certain time groups and timeslots. This packet control unit may be located in different nodes, e.g., as shown in the figure, in the base station subsystem, BSS.

It should of course also be noted that the above strategies may be applicable to other systems than a pure GPRS system. Specifically, the invention is readily applicable to the extensions of GPRS with a higher level modulation.

The reuse pattern illustrated for the control channels in the different embodiments of the present invention is a 3/9 reuse pattern. There are of course variations of this as well. An additional time group may be allocated for control channel signalling, such that there are four different time groups, each separated by one timeslot. This will further increase the frequency and timeslot reuse pattern to a 4/12 reuse pattern, i.e., 12 different physical channels are allocated such that for four base station sites, each base station site transmit on all the frequencies but in different time groups.

The timeslot numbering used to describe the present invention is exemplary and it should be recognized to someone skilled in the art that in fact, all control channel signalling can take place in TS0. If the time synchronization between the base station sites is such that TS0 in one site coincides with, e.g., TS2 in another base station site etc the effects will be the same.

For purposes of explanation, control channels have been allocated to different sites.

Although the present invention have been described with examples from a packet switched communication system compliant to the GPRS/GSM standard specification, it should be noted that the solutions presented may be equally well applicable to any other packet switched data communication system. The specific embodiments should therefore be considered exemplary rather than limiting the scope of the invention. The invention should be rather be defined by the following claims.

**CLAIMS**

1. A cellular communications system comprising at least one base station site  
synchronized system part, including a packet switched mode, wherein packet  
5 control channels are allocated on physical channels, consisting of a combination  
of frequency and at least one time slot, and wherein said physical channels  
carrying packet control signalling are arranged in a reuse pattern, such that both  
frequency and timeslot are utilized in said reuse pattern, comprising:
- means for allocating, in a first base station site, said control channel signalling to  
10 a certain set of physical channels on at least one frequency and a certain time  
group, defined by at least one timeslot,
- means for allocating, in a second base station site, said control channel signalling  
to a certain set of physical channels on said at least one frequency and a certain  
time group, defined by at least one timeslot, wherein said time group used in said  
15 second base station site is defined to be non-simultaneous in transmission to said  
time group used in said first base station site,
- means for preventing, in said second base station site, the allocation of user data  
channels on physical channels that substantially coincide in time and frequency  
with physical channels allocated for control channel signalling in said first base  
20 station site.
2. The system of claim 1, wherein said synchronized system part transmits  
information over the air on 200 kHz carriers, each carrier being divided into 8  
timeslots.
- 25
3. The system of claim 1, wherein, for the synchronized system part, control  
signalling allocation in a substantial communication coverage region is done on

three 200 kHz carriers in a 1/3 frequency reuse pattern and an overlaid 1/3 time group reuse pattern, creating 9 groups of physical channels, each group being defined by a frequency and at least one timeslot.

5        4. The system of claim 1, wherein user data traffic is transmitted on physical channels arranged in a 1/3 reuse pattern.

5. The system of claim 1, wherein, for the synchronized system part, control signalling allocation in a substantial communication coverage region is done on  
10       three 200 kHz carriers in a 1/3 frequency reuse pattern and an overlaid 1/4 time group reuse pattern, creating 12 groups of physical channels, each group being defined by a frequency and at least one timeslot.

6. A cellular communications system comprising at least one base station site  
15       synchronized system part, including a packet switched mode, wherein packet control channels are allocated on physical channels consisting of a combination of frequency and at least one time slot, and wherein said physical channels carrying packet control signalling are arranged in a reuse pattern, such that both frequency and timeslot are utilized in said reuse pattern, comprising;

20       -means for allocating, in a first base station site, said control channel signalling to a certain set of physical channels on at least one frequency and a certain time group, defined by at least one timeslot,

-means for allocating, in a second base station site, said control channel signalling to a certain set of physical channels on said at least one frequency and a certain  
25       time group, defined by at least one timeslot, wherein said time group used in said second base station site is defined to be non-simultaneous in transmission to said time group used in said first base station site and wherein the transmission is separated in time corresponding to at least one timeslot.

7. The system of claim 6, wherein said synchronized system part transmits information over the air on 200 kHz carriers, each carrier being divided into 8 timeslots.

5 8. The system of claim 6, wherein, for the synchronized system part, control signalling allocation in a substantial communication coverage region is done on three 200 kHz carriers in a 1/3 frequency reuse pattern and an overlaid 1/3 time group reuse pattern, creating 9 groups of physical channels, each group being defined by a frequency and at least one timeslot

10

9. The system of claim 6, wherein user data traffic is transmitted on physical channels arranged in a 1/3 reuse pattern.

10. The system of claim 6, wherein, for the synchronized system part, control  
15 signalling allocation in a substantial communication coverage region is done on three 200 kHz carriers in a 1/3 frequency reuse pattern and an overlaid 1/4 time group reuse pattern, creating 12 groups of physical channels, each group being defined by a frequency and at least one timeslot.

20 11. A method in a cellular communications system comprising at least one base station site synchronized system part, including a packet switched mode, where packet control channels are allocated on physical channels consisting of a combination of frequency and at least one time slot, wherein said physical channels carrying packet control signalling are arranged in a reuse pattern, such  
25 that both frequency and timeslot are utilized in said reuse pattern, said method comprising the steps of;

- allocating in a first base station site, said control channel signalling to a certain set of physical channels on at least one frequency and a certain time group, defined by at least one timeslot,
- allocating in a second base station site, said control channel signalling to a certain set of physical channels on said at least one frequency and a certain time group, defined by at least one timeslot, where said time group used in said second base station site is defined to be non-simultaneous in transmission to said time group used in said first base station site,
- preventing the allocation of user data channels on physical channels that substantially coincide in time and frequency with physical channels allocated for control channel signalling in said first base station site.

12. A method in a cellular communications system comprising at least one base station site synchronized system part, including a packet switched mode, wherein packet control channels are allocated on physical channels consisting of a combination of frequency and at least one time slot, and wherein said physical channels carrying packet control signalling are arranged in a reuse pattern, such that both frequency and timeslot are utilized in said reuse pattern, said method further comprising the steps of;

- allocating in a first base station site, said control channel signalling to a certain set of physical channels on at least one frequency and a certain time group, defined by at least one timeslot,
- allocating in a second base station site, said control channel signalling to a certain set of physical channels on said at least one frequency and a certain time group, defined by at least one timeslot, wherein said time group used in said second base station site is defined to be non-simultaneous in transmission to said



time group used in said first base station site and wherein the transmission is separated in time corresponding to at least one timeslot.

13. A method for coding transmissions on a packet synchronization channel, PSCH, for transmission on the same physical channel as other GPRS common control channels, where said packet synchronization channel includes at least information about a base station from where it is transmitted and a TDMA frame repetition sequence number, indicating where, in a TDMA frame repetition pattern it is transmitted, said method comprising the steps of;

10 -coding said transmission on said packet synchronization channel (PSCH) such that it is equal in bit size to transmissions on a synchronization channel (SCH) transmitted on the same physical channel as other GSM common control channels,

15 -coding said packet synchronization channel (PSCH) such that at least a three bit pattern in said packet synchronization channel (PSCH) always differ from any possible bit pattern transmitted in any circuit switched synchronization channel (SCH) transmitted on the same physical channel as other GSM common control channels.


20 14. The method of claim 13, wherein said packet synchronization channel (PSCH) is transmitted once every 52 multiframe cycle.

15. The method of claim 14, wherein a Packet Frequency Correction Channel is transmitted once every 52 multiframe cycle.

25


16. The method of claim 13, wherein the PSCH is transmitted on 200 kHz carriers from time synchronized base station sites.

FIG. 1

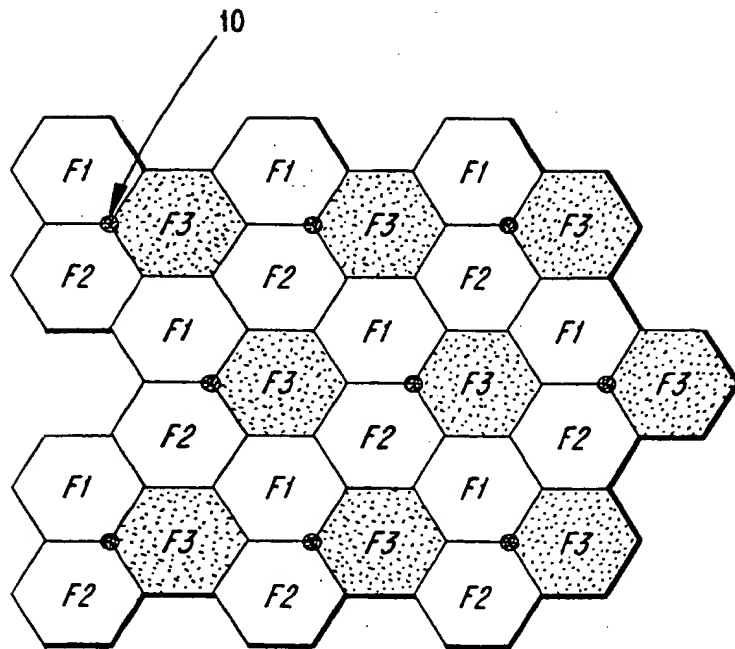


2/8

FIG. 2

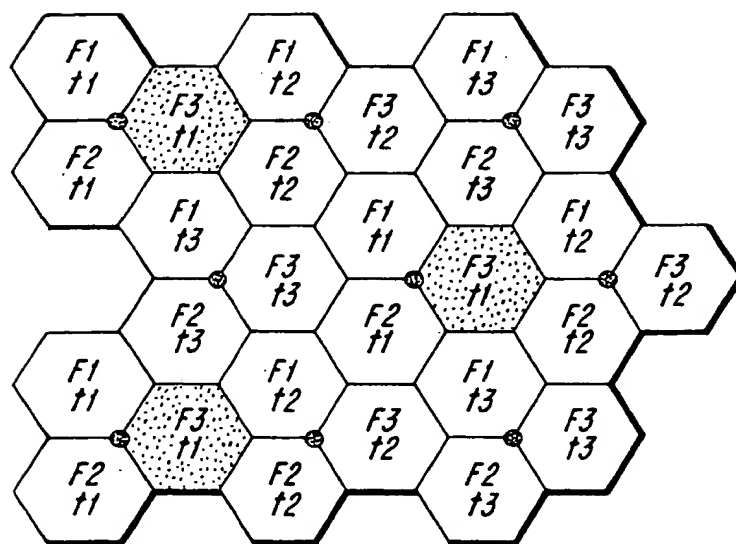

3/8

FIG. 3

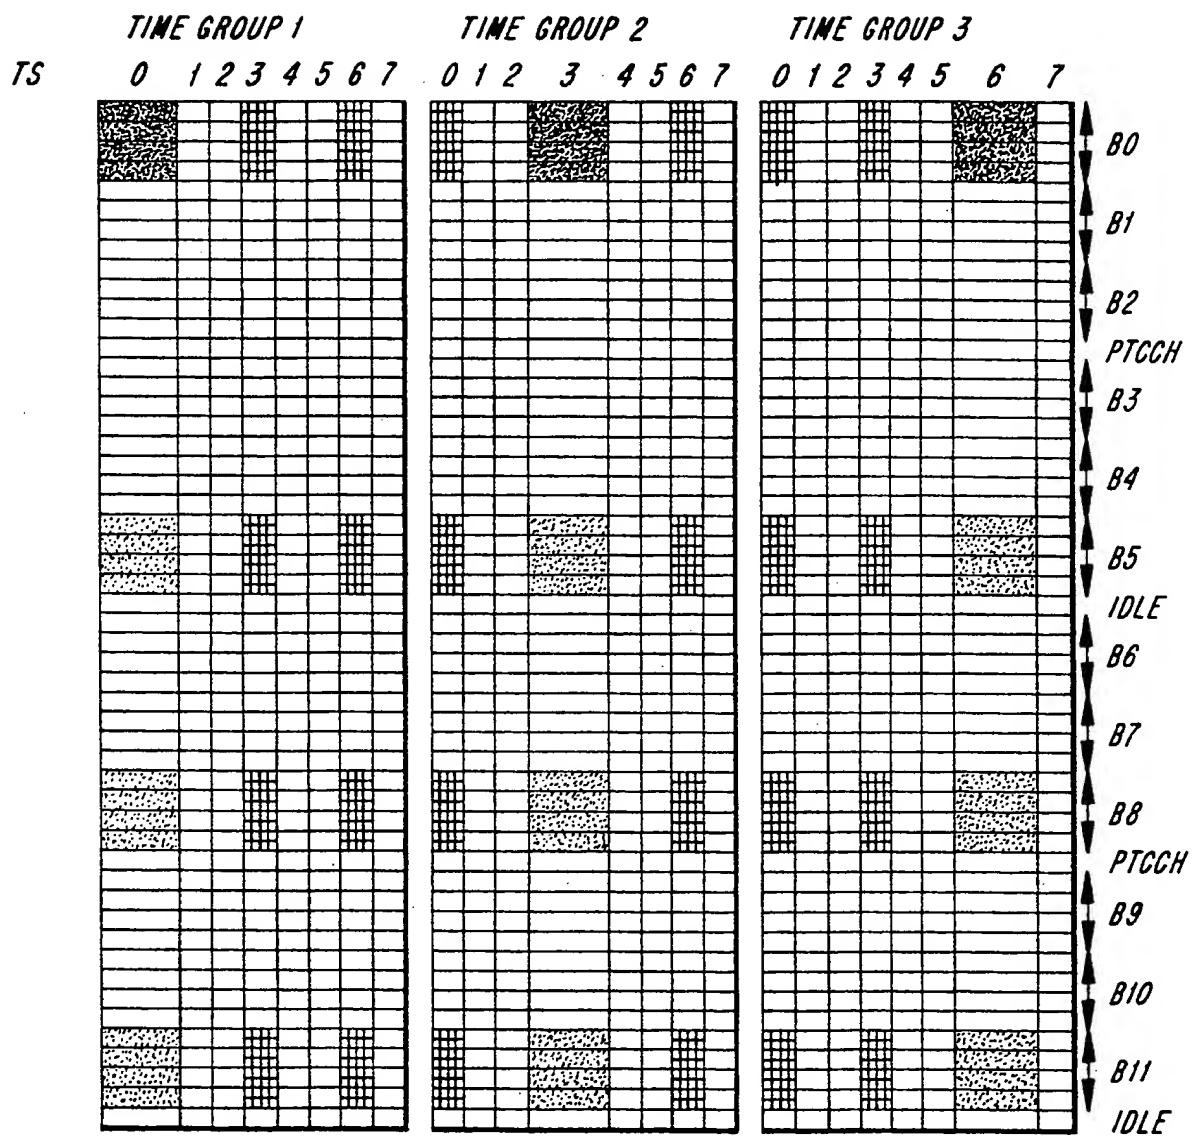

4/8

FIG. 4

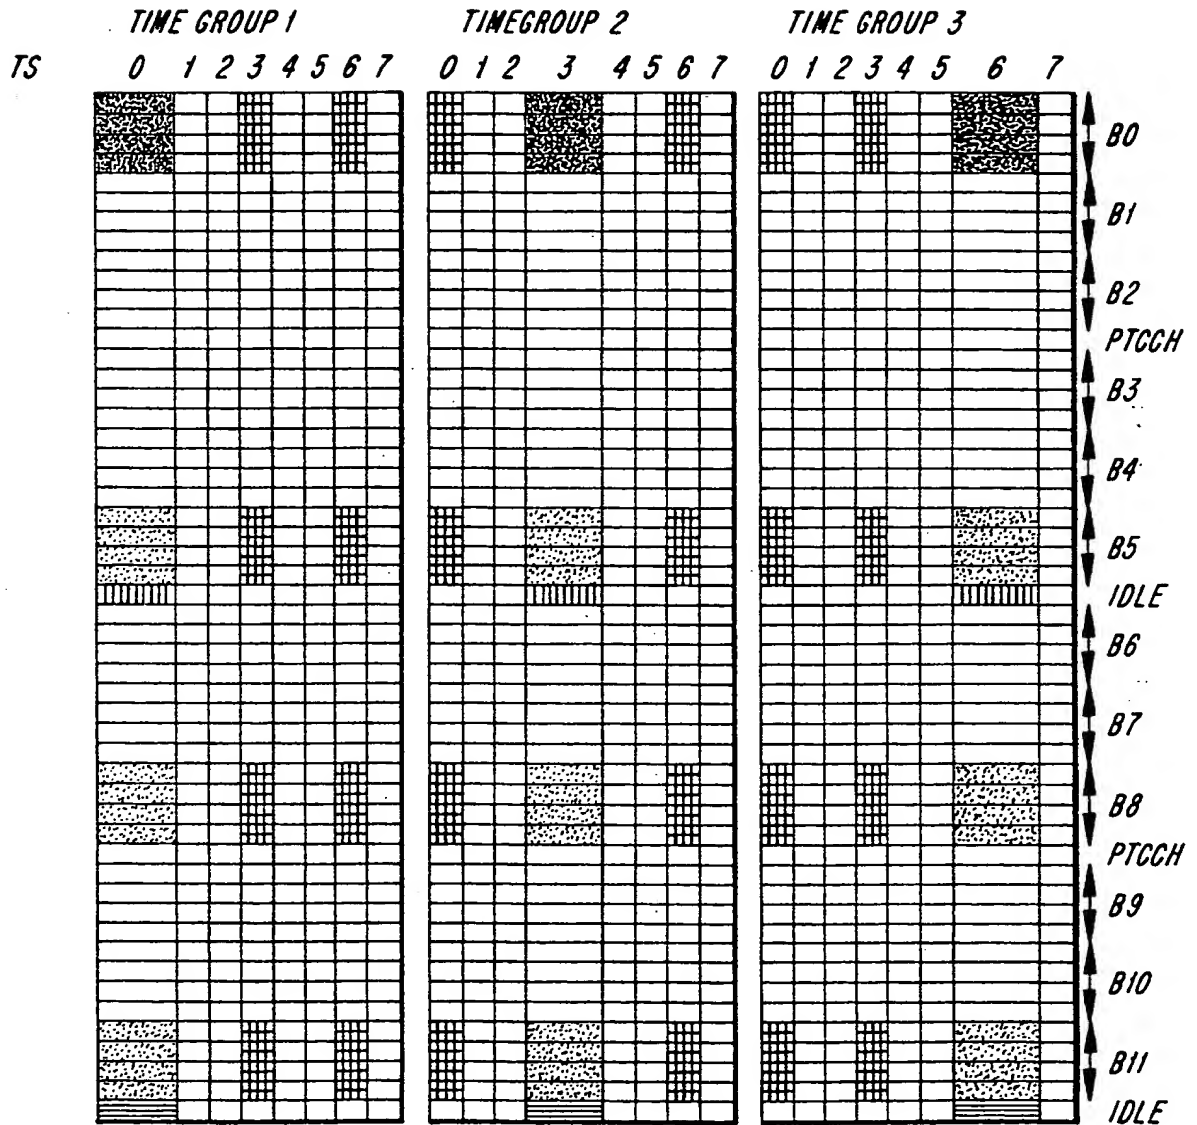


FIG. 5a

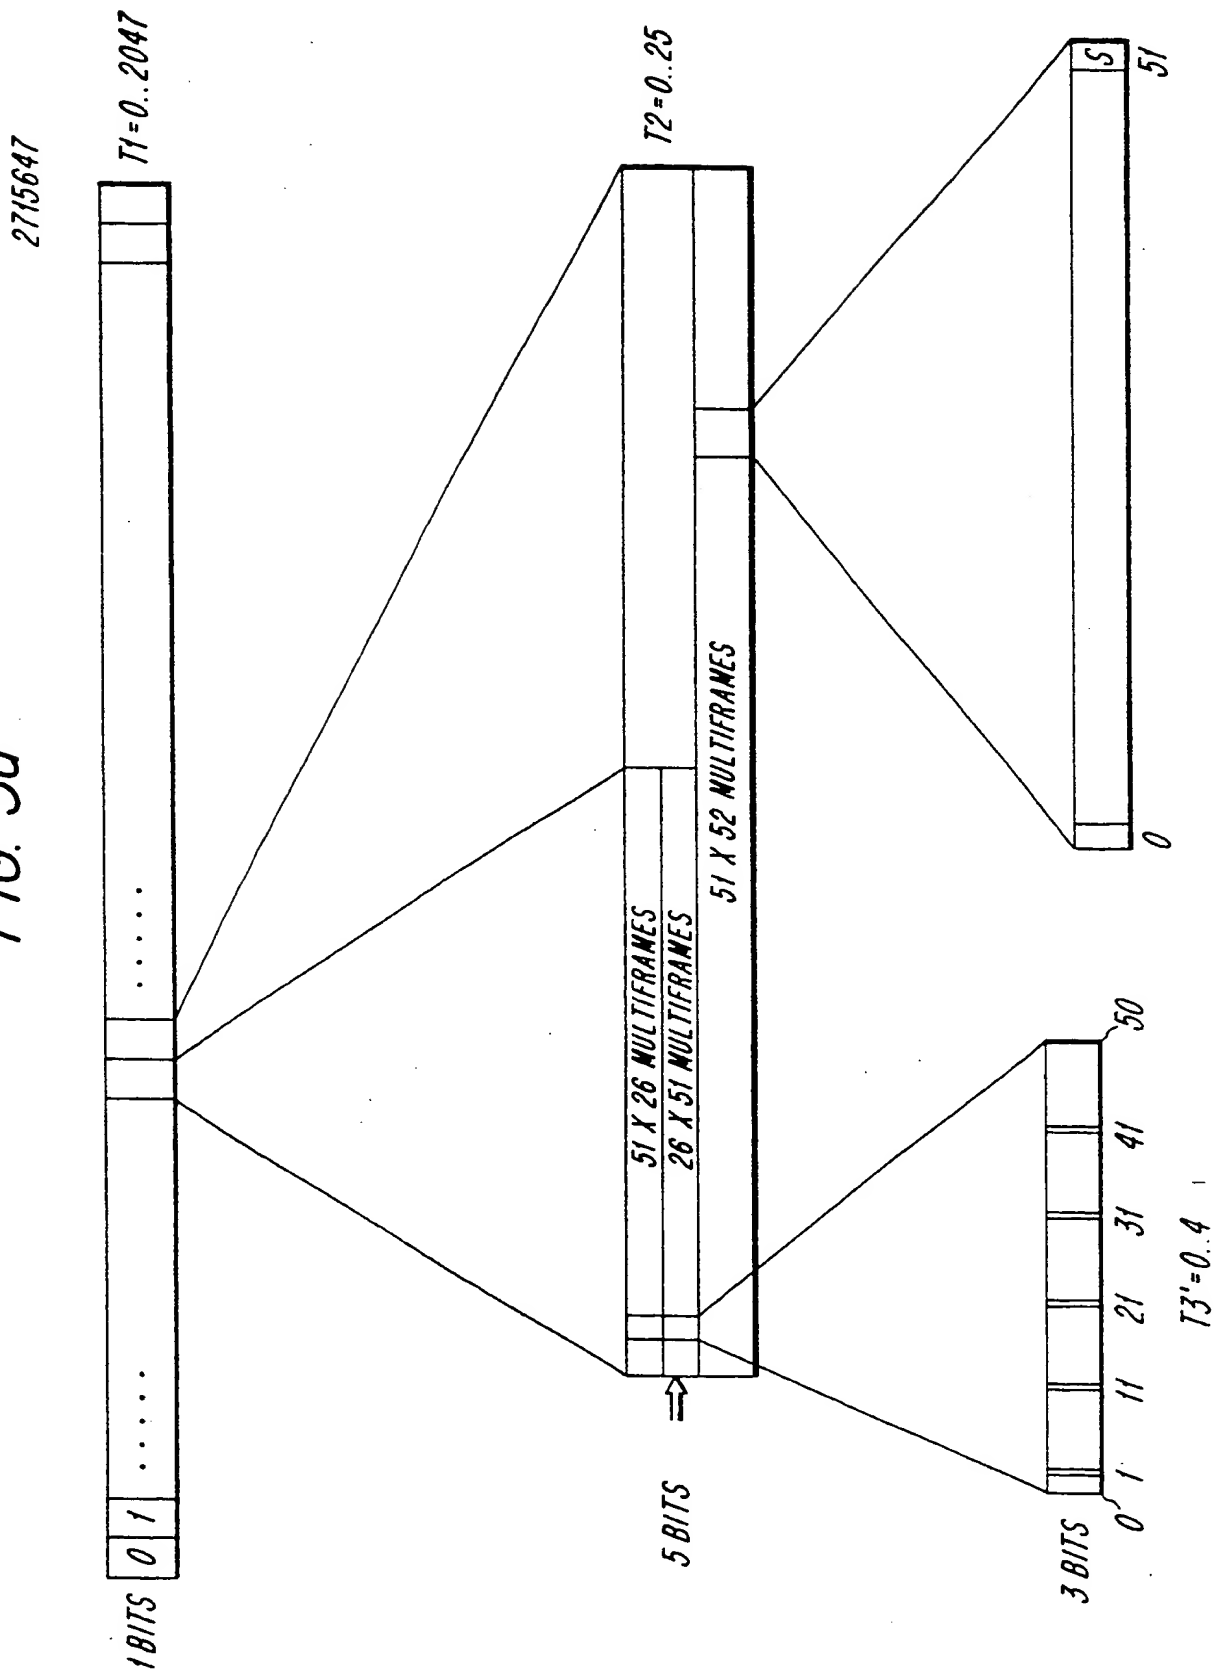


FIG. 5b

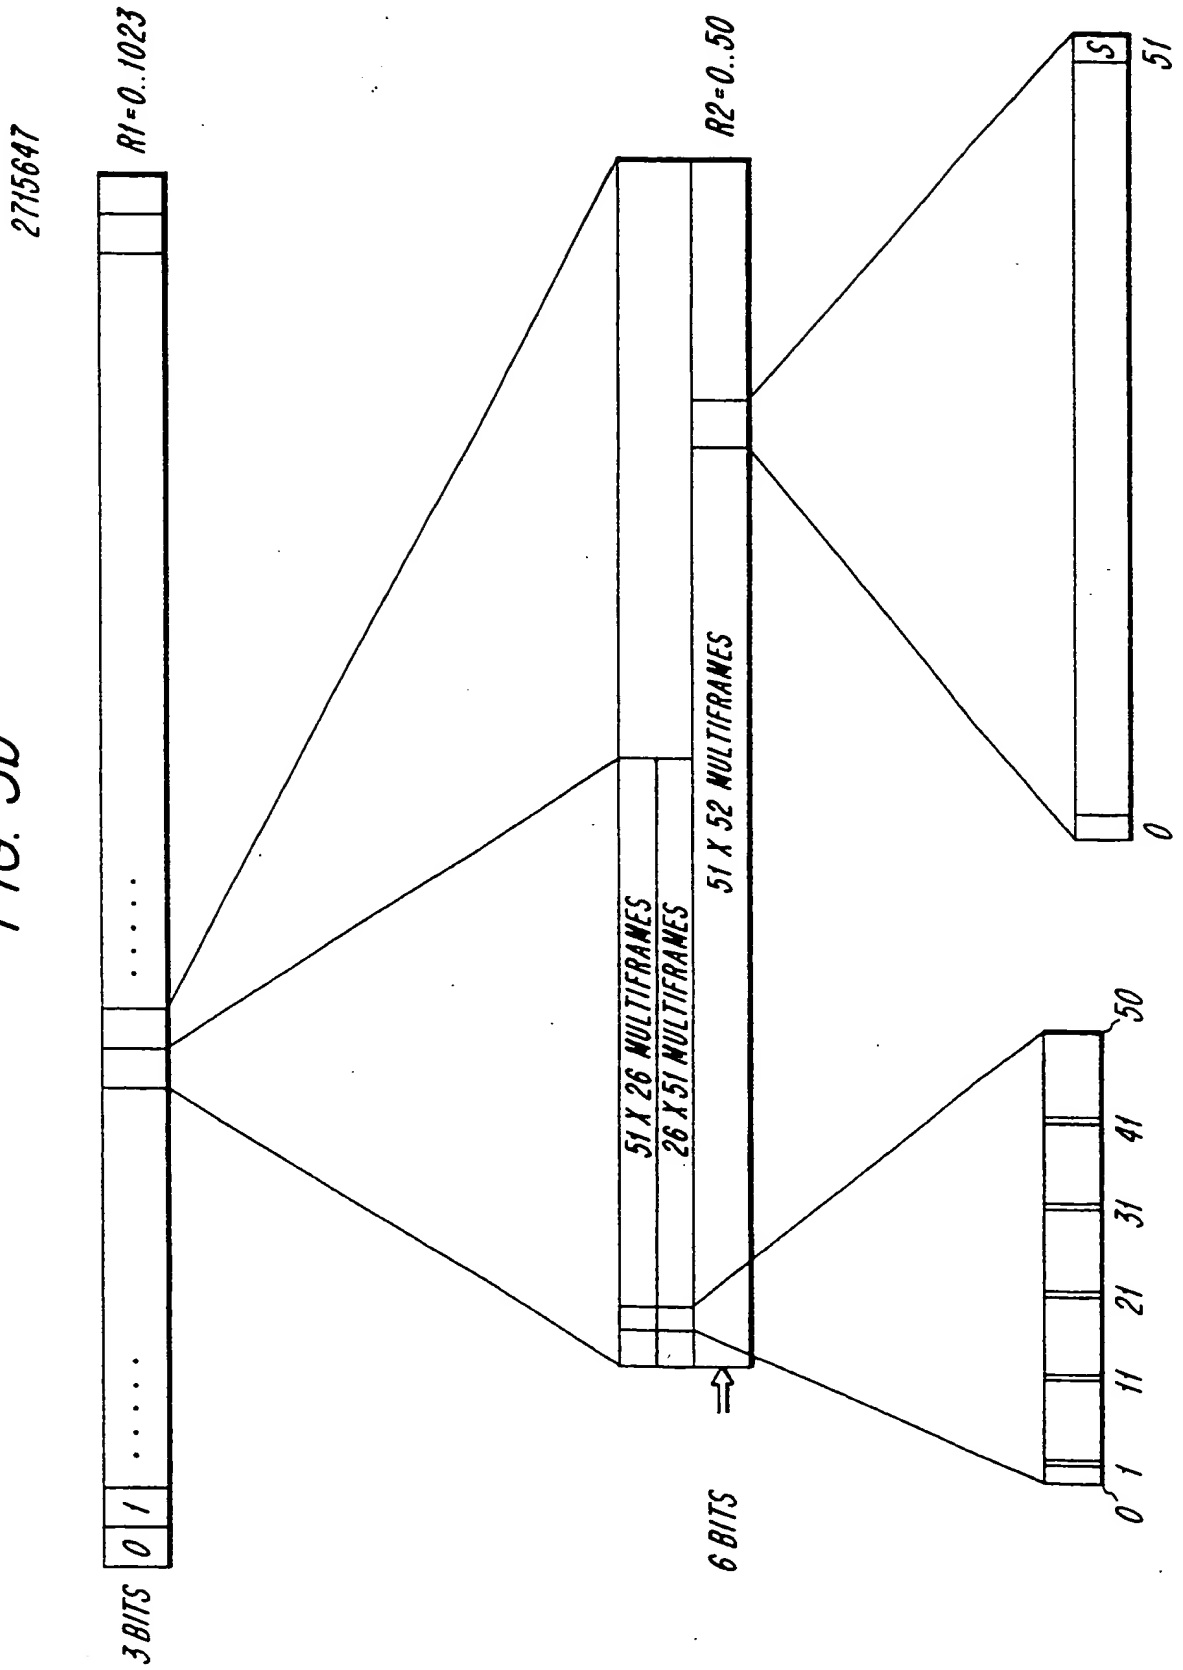


FIG. 6


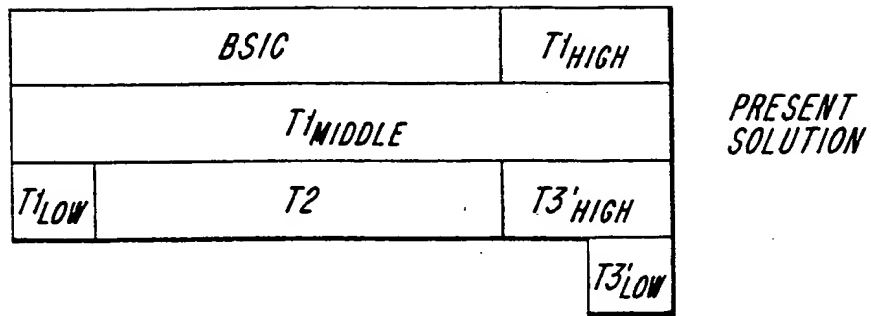



FIG. 7



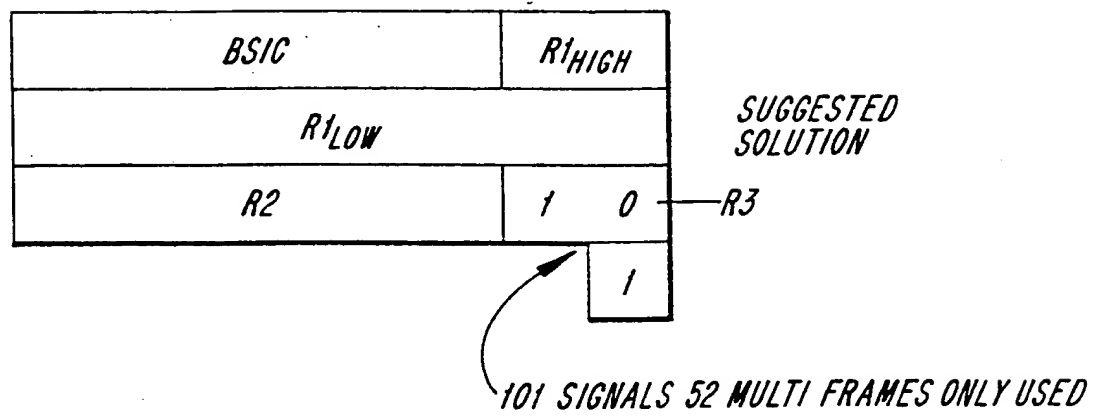

8/8

FIG. 8

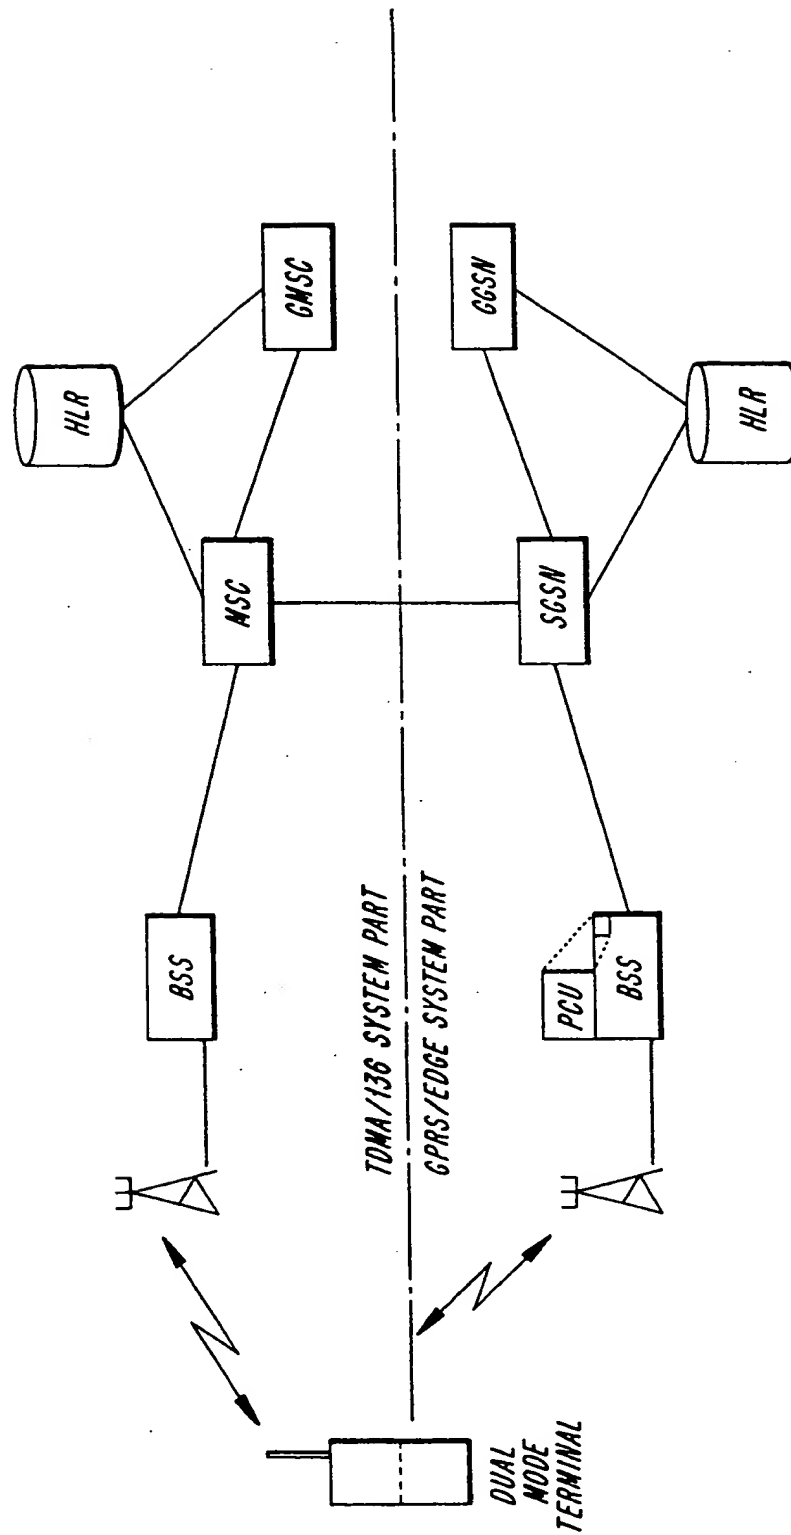

**This Page Blank (uspto)**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
14 September 2000 (14.09.2000)

PCT

(10) International Publication Number  
**WO 00/54533 A3**

(51) International Patent Classification<sup>7</sup>: H04Q 7/36

(21) International Application Number: PCT/SE00/00245

(22) International Filing Date: 8 February 2000 (08.02.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/263.950 8 March 1999 (08.03.1999) US

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (PUBL) [SE/SE]; S-126 25 Stockholm (SE).

(72) Inventors: LINDHEIMER, Christofer; Köpenhamns-  
gatan 26, S-164 24 Kista (SE). MAZUR, Sara; Vikavägen  
11, S-167 71 Bromma (SE). MOLNÖ, Johan; Kungsklip-  
pan 12, S-112 25 Stockholm (SE).

(74) Agent: NORIN, Klas; Ericsson Radio Systems AB, Com-  
mon Patent Department, S-164 80 Stockholm (SE).

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

— With international search report.

(88) Date of publication of the international search report:  
11 January 2001

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND SYSTEM FOR WIRELESS PACKET DATA COMMUNICATION

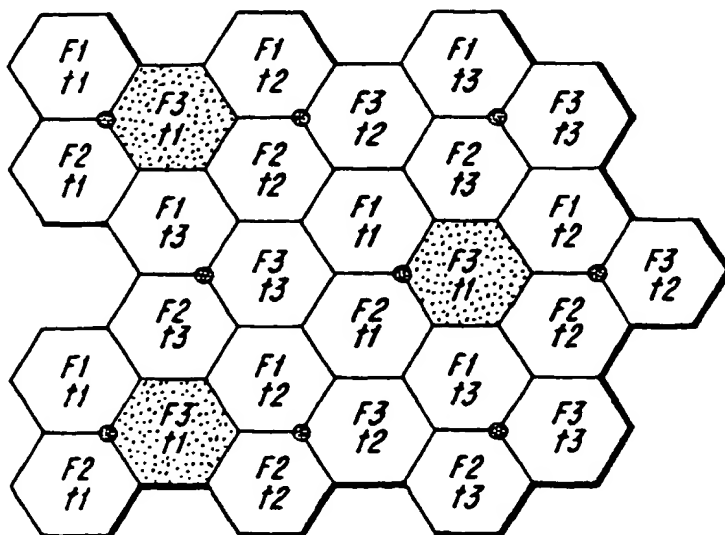

(57) Abstract: A system and method for a synchronized packet data communication system is described. Control channels are transmitted in a reuse pattern defined by both frequency and timeslot division. Each timeslot division is such that different timeslot groups included in the repetition pattern are separated by at least one timeslot. No traffic data transmissions occur simultaneous to the control channel transmissions. Furthermore, a synchronization channel is introduced to be transmitted on the same physical channel as other packet common control channels.

WO 00/54533 A3

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 00/00245

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04Q7/36

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 12489 A (PACIFIC COMM SCIENCES INC) 3 April 1997 (1997-04-03) cited in the application page 2, line 15 - line 22 page 4, line 9 - line 19 page 5, line 13 - line 15 page 8, line 17 - line 19 page 10, line 32 - page 11, line 2 ---	1-12
A	US 5 774 790 A (DUPUY PIERRE) 30 June 1998 (1998-06-30) column 5, line 38 - column 6, line 3 column 7, line 13 - line 19 claim 1 ---	1,6,11, 12
A	US 5 570 352 A (POEYHOENEN PETRI) 29 October 1996 (1996-10-29) column 6, line 33 - column 7, line 40 --- -/--	1,6,11, 12

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

11 July 2000

Date of mailing of the international search report

19.09.00

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Kampouris, A

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 00/00245

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 111 534 A (BENNER FRANK D) 5 May 1992 (1992-05-05) column 6, line 4 - line 22 column 6, line 35 - line 40 column 6, line 61 -column 7, line 2 ---	1,3-6, 8-10
A	US 5 732 076 A (KETSEOGLU THOMAS J ET AL) 24 March 1998 (1998-03-24) column 1, line 40 - line 54 column 7, line 11 - line 20 column 27, line 32 -column 28, line 4 -----	1-3,5-8, 10

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/SE 00/00245

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-12

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

1. Claims: 1-12

A method for the reduction of the frequency spectrum occupation of a GPRS system.

2. Claims: 13-16

A method to provide synchronisation for a GPRS packet switched system.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 00/00245

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9712489 A	03-04-1997	AU 7116796 A CN 1200224 A EP 0852882 A JP 11504779 T US 6038455 A	17-04-1997 25-11-1998 15-07-1998 27-04-1999 14-03-2000
US 5774790 A	30-06-1998	FR 2708813 A AU 689108 B AU 6748794 A CA 2128809 A EP 0637180 A FI 943535 A	10-02-1995 26-03-1998 09-02-1995 31-01-1995 01-02-1995 31-01-1995
US 5570352 A	29-10-1996	FI 922046 A AT 172828 T AU 4262893 A DE 69321831 D DE 69321831 T EP 0639312 A WO 9322849 A JP 7506472 T NO 944217 A	07-11-1993 15-11-1998 29-11-1993 03-12-1998 22-04-1999 22-02-1995 11-11-1993 13-07-1995 03-01-1995
US 5111534 A	05-05-1992	CA 2023053 A AU 8173191 A EP 0470831 A JP 5037449 A	11-02-1992 13-02-1992 12-02-1992 12-02-1993
US 5732076 A	24-03-1998	AU 7394196 A BR 9611169 A CA 2235551 A EP 0857381 A JP 11513871 T WO 9716000 A	15-05-1997 06-04-1999 01-05-1997 12-08-1998 24-11-1999 01-05-1997